




Precise surveying and measuring



Nedo Builders' Levels X-Series

Easy to handle and very robust automatic builder's levels

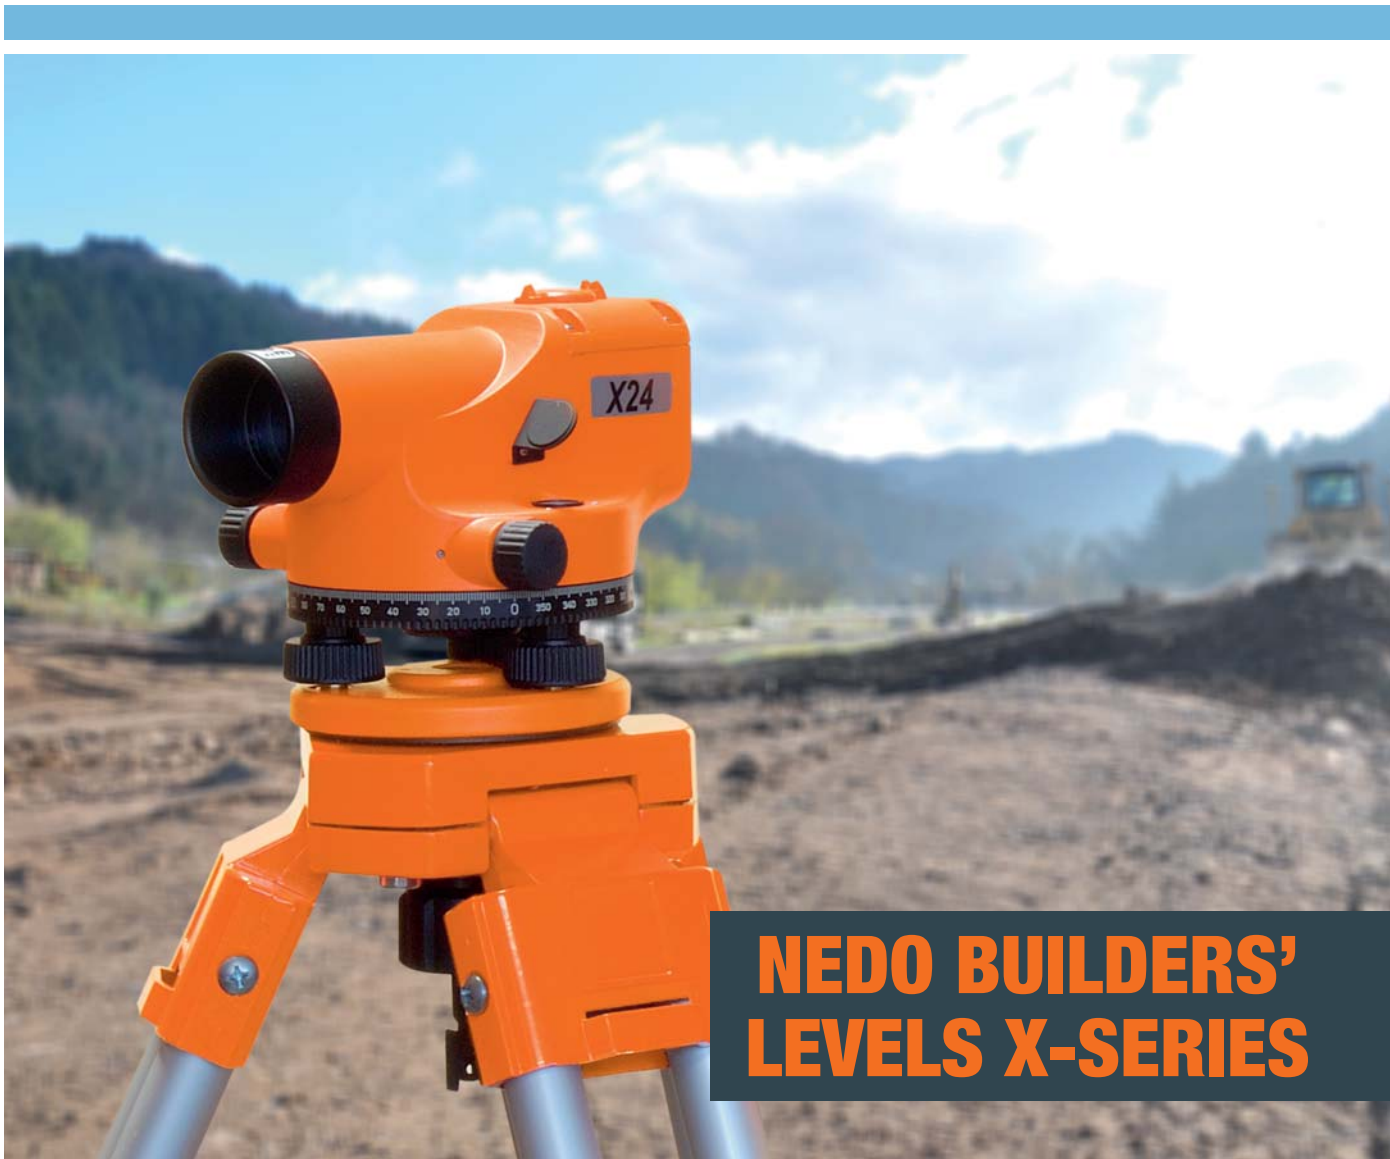

**NEDO BUILDERS'
LEVELS X-SERIES**



Features:

- Automatic builders' level with 20x, 24x, 28x and 32x magnification
- Bright optics with large objective aperture
- Rugged metal housing
- Sturdy, reliable air-damped compensator
- High-contrast image
- Inspection record
- Comes with plumb bob, adjusting pin and robust case
- Also available as a set

Nedo Builders' Levels X-Series

	X20	X24	X28	X32
Ref.-No. (horizontal circle gon)	460 770-613	460 745-613	460 787-613	460 792-613
Ref.-No. (horizontal circle degrees)	460 771-613	460 746-613	460 788-613	460 793-613
Ref.-No. Set (horizontal circle gon)	462 205	462 245	462 285	462 325
Image	upright	upright	upright	upright
Magnification	20x	24x	28x	32x
Clear objective aperture	30 mm	36 mm	36 mm	36 mm
Shortest focusing distance	0.6 m	0.6 m	0.6 m	0.6 m
Multiplication factor	100	100	100	100
Compensator operating range	± 15'	± 15'	± 15'	± 15'
Setting accuracy	± 0.5"	± 0.5"	± 0.4"	± 0.3"
Horizontal circle	400 gon / degrees	400 gon / degrees	400 gon / degrees	400 gon / degrees
Sensitivity of circular bubble	8'/2 mm	8'/2 mm	8'/2 mm	8'/2 mm
Standard deviation per km double-run levelling	± 2.5 mm	± 2.0 mm	± 1.5 mm	± 1.0 mm
Protection class	IP 54	IP 54	IP 54	IP 54
Weight	1.7 kg	1.7 kg	1.7 kg	1.7 kg
Connecting thread	5/8"	5/8"	5/8"	5/8"



Levelling set with X-level consisting of:

- 5 m levelling staff and bag No. 345 122-613
- Aluminium tripod No. 200 215-613



Nedo GmbH & Co. KG

Hochgerichtstrasse 39-43
D-72280 Dornstetten
Phone +49 (0) 7443 24 01-0
Fax +49 (0) 7443 24 01-45

info@nedo.com
www.nedo.com

Your Nedo Dealer